

Instruction for Vector Optics Zalem 1-10x24 Riflescope



WARNING: NEVER LOOK AT THE SUN THROUGH THE RIFLESCOPE (OR ANY OTHER OPTICAL INSTRUMENT). IT MAY PERMANENTLY DAMAGE YOUR EYES.

EYEPiece FOCUSING

The eyepiece is designed to provide a precise fast focus at certain eye relief. The eyepiece will focus faster than your eye can compensate for any inaccuracy in your adjustment.

MOUNTING

The riflescope is installed on gun by means of a pair of weaver or dovetail mount rings. Use qualified mount with base designed to fit your particular rifle. The riflescope shall be mounted as low as possible without touching either the barrel or the receiver. For safety reasons, allow at least 3 inches of clearance between the riflescope and your eyes when shooting. Slide riflescope forward or backward to acquire the proper eye relief that allows you to see full field of view. Rotate the riflescope in the rings that the vertical crosshair is vertical and horizontal crosshair is horizontal. Then tighten all screws to fix riflescope firmly on the rifle.

Don't exceed 16 inch / pounds of torque on the ring's screws. It may lead to damage to the riflescope and mount.

ZEROING

Zalem riflescope features audible click elevation and windage adjustments. Elevation is the vertical (up-and-down) adjustment usually on the top of the riflescope. Windage is the horizontal (left-to-right) adjustment, usually on the right of the scope.

The scope features 1/ 10 MIL windage and elevation adjustment with audible clicks, meaning that 1 click moves the point of impact 1/10 MIL at 100 yards or 1cm at 100 meters.

With the riflescope mounted, rest the firearm onto a solid support and aim at a target 100 yards away. Slowly shoot a small 3 to 5 rounds test group onto your target. Adjust windage & elevation screws in the direction you want to move the bullet impact. Each click of adjustment moves the point of impact. Shoot another 3 to 5 rounds test group. Repeat until you are satisfied with the point of aim.

VARIABLE MAGNIFICATION ADJUSTMENTS

To change magnification, simply rotate the Power Selector Ring to achieve the designed power with index dot.

Generally speaking, lowest power to have the widest field of view for quick shots at close range. Higher power should be reserved for precise long-range shots.

TURNING ON & ADJUSTING THE BRIGHTNESS LEVEL

Located on the left of the riflescope, controls the reticle illumination. There are 11 brightness levels red for Zalem 1-10x24 riflescope.

Turning the knob will turn the illumination on. Simply turn the switch to adjust the brightness level of the reticle.

You can increase the brightness level to #11, which is the highest setting. Set the switch to 0 will turn the red illumination off.

SEALED, WATERPROOF AND FOGPROOF

The riflescope is nitrogen-purged to remove any vestige of internal moisture, also has O-ring to prevent the entry of dust or moisture.

MAINTENANCE

Your riflescope, though amazingly tough, is a precision instrument that deserves reasonable cautious care.

- When cleaning the lens, first blow away any dirt and dust, or use a soft lens brush. Fingerprints and lubricants can be wiped off with lens tissue, or a soft clean cotton cloth, moistened with lens cleaning fluid.
- All moving parts of the riflescope are permanently lubricated. Do not try to lubricate them.
- No maintenance is needed on the riflescope's outer surface, except to occasionally wipe off dirt or fingerprints with a soft cloth.
- Use lens covers whenever convenient.

STORAGE


Avoid storing the riflescope in hot places, such as the passenger compartments of vehicles on hot days. The high temperatures could adversely affect the lubricants and sealants. A vehicle's trunk, a gun cabinet or a closet is preferable. Never leave the riflescope where direct sunlight can enter either the objective lens. Damage may result from the concentration (burning glass effect) of the sun's rays.

For More details please visit our website: www.vectoroptics.com

VECTOR OPTICS



VET-10BDC Reticle Pattern

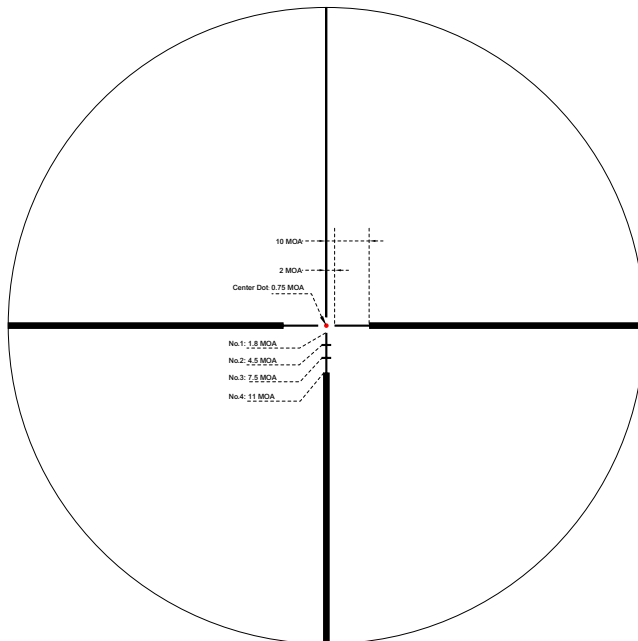

Aiming Reference	Distance	Distance	Distance	Distance	Distance
	Hi-Power E.g. 30-06, .308, .270	Hi-Power & Magnum E.g. 300 Win, 7mm Rem	Hi-Velocity, Varmint	Modern Black Powder	.22 LR Rimfire
Center Dot	100 yards	200 yards	200 yards	100 yards	50 yards
No.1 Mark	200 yards	300 yards	300 yards	125 yards	60 yards
No.2 Mark	300 yards	400 yards	450 yards	200 yards	90 yards
No.3 Mark	400 yards	500 yards	550 yards	225 yards	120 yards
No.4 Mark	500 yards	600 yards	650 yards		140 yards