




Please refer to user manual carefully before using

PRODUCT ILLUSTRATION

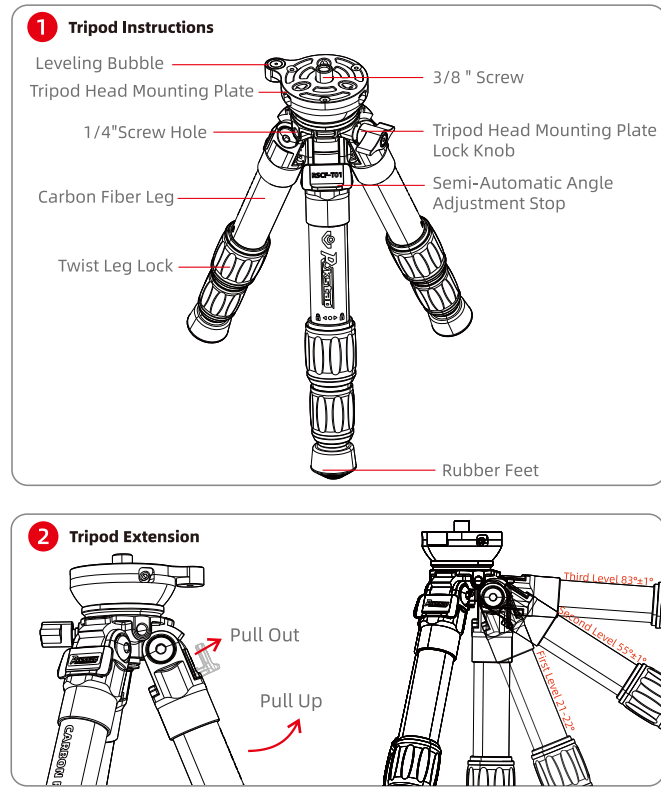

PRODUCT USAGE INSTRUCTIONS

1 Tripod Instructions

2 Tripod Extension (as picture shown)

Pull out the semi-automatic angle adjustment stop and extend the leg tubes outward. Each leg tube can be adjusted to three different heights: low, medium, and high. Once the desired angle is reached, push the semi-automatic angle adjustment stop to the locked position.

The adjustable angles for the three positions are as follows:

First Level (low) : 21-22 degrees

Second Level (medium) : 55 ± 1 degrees

Third Level (high) : 83 ± 1 degrees

When the leg tube is in the third or second level, simply retract the leg tube and the semi-automatic angle adjustment stop will automatically slide into the slot of the next position, fixing the angle.

3 Tripod Leg Extension (as picture shown)

Adjust the leg length, first twist the twist leg lock clockwise (when viewed from above) to loosen the tension. Extend the leg to your desired length, then twist the twist leg lock counterclockwise (when viewed from above) to secure it in place.

4 Tripod Head Mounting Plate Level Adjustment (as picture shown)

Rotate the tripod head mounting plate lock knob counterclockwise to loosen the platform. Adjust the angle of the tripod head mounting plate platform until the bubble in the level is centered. Within the red circle. At this point, the tripod head mounting plate is level.

5 Mounting the Tripod Head (as picture shown)

Align the mounting screw hole of the tripod head with the 3/8\"/>

Note: Ensure that the tripod and the head are locked to prevent accidental slipping of the equipment.

Before using the tripod, adjust its height and angle to find a stable and flat surface. Once positioned, firmly mount your equipment onto the tripod head.

PRODUCT SPECIFICATION

Sections	Extended	Folded	Weight	Leg Max.Load	Leg Dia.
3	14.9in/38cm	9.8in/25cm	1.4lb/0.6kg	39.6lb/18kg	0.9in/22.4mm

CAUTIONS

-  Do not overload product max capacity.
-  Ensure Centre Column and/or Base Plate is tightened as much as possible by hand.
-  The product is not suitable for use in temperatures below -20°C (-4°F) or above 70°C (158°F). The product is not suitable for use in salt water.
-  Do not leave the product in direct sunlight, or against car windows for long periods of time.
-  Remove the equipment when the product is not in use, or moving about.
-  Do not use equipment lubrication on this product. Only use a standard lubricant or grease when necessary.



FIVE YEARS LIMITED WARRANTY

Your ROKSTAD product is warranted free of defects in materials and workmanship for a period of 5 years from the time of purchase by the original purchaser. This warranty covers accidental damage, as well as any defects in materials and workmanship. Damages caused by misuse or improper handling are not covered. In the event of a defect under this warranty, we promise to repair or replace your product and ship it back to you absolutely free of charge. Also, this warranty is null and void if modification or maintenance is provided by someone other than Vector Optics. This warranty is non-transferable. For products not directly purchased from us, please contact the local dealer for an applicable warranty.

<https://www.vectoroptics.com/Warranty-Registration/>

For more details please visit our website, thanks for your support!

Authorised Dealer (Name): _____

Contact Details (Phone and Email): _____

Product No: _____

Purchase Date: _____

Inspection Date: _____

Warranty Date: _____

Return Date: _____

▼ Scan the QR code to learn more about VectorOptics



VECTOROPTICS



USER MANUAL



FACEBOOK



INSTAGRAM