



 **VICTOPTICS**

2026 CATALOG

VISIT US ON

We focused on AR and entry-level airgun scopes, this lineup is a new shooter's first step into the world of optics and a trusted choice in the recreational shooting community. Built with thoughtful features and good quality, the optics are simple, fun, and designed to make every game more enjoyable.



VictOptics



TABLE OF CONTENTS

S LINE RIFLE SCOPES -S10, S6, S4, S01

OTHER RIFLE SCOPES

RED DOT SIGHT

MAGNIFIER

BINOCULAR

SPOTTING SCOPE

RANGE FINDER

SCOPE RINGS

S10

Series

4

Victoptics S10



Stefano Henrique Shindi Kawato, Brazil

I had the chance to use the S10 last Sunday, and it was amazing! It's a fantastic LPVO—the zoom is super smooth, and the true 1x with both eyes open really stood out. Besides, the 100mm eye relief was a great touch—very comfortable and user-friendly in the field

FEATURE

1-10x24 | 1-10x24i


- 30mm Monotube
- Fully Multi-coated
- Wide Field of View
- Edge-to-Edge Clarity
- Turret Lock Feature



SFP

1-10x24 OPSL37


Low Power Variable Optic | 1/10MIL Adjustment with Turret Lock Feature
5 Levels **R** & **G** Illumination



SFP

1-10x24i Fiber OPSL39


Low Power Variable Optic | Fiber Center Dot Reticle
5 Levels **R** & **G** Illumination | 1/4MOA Adjustment



SFP

1-10x24 One Piece High Mount Combo OPSL137


Low Power Variable Optic | 1/10MIL Adjustment with Turret Lock Feature
5 Levels **R** & **G** Illumination | With One Piece 49mm 1.93" High Picatinny Mount



SFP

1-10x24i Fiber One Piece High Mount Combo OPSL139

Low Power Variable Optic | Fiber Center Dot Reticle
5 Levels **R** & **G** Illumination | 1/4MOA Adjustment
With One Piece 49mm 1.93" High Picatinny Mount



Victoptics S10

5



PRODUCT SPECS

SKU	Name	Reticle	Illumination	Eye Relief (mm/in)	F.O.V (ft@100 yds)	Adjustment Range	Tube Size	Length (mm/in)	Weight (net)(g/oz)	Click Value	Parallax Adjustment
OPSL37/137	1-10x24 SFP	VS10-1 MIL	5 Levels R & G	100 / 4.0	111-11.1	>35MIL	30mm	274 / 10.8	588 / 20.7	1/10MIL	100yds
OPSL39/139	1-10x24 SFP	VS10-2 MOA	5 Levels R & G	100 / 4.0	111-11.1	>120MOA	30mm	274 / 10.8	597 / 21.0	1/4MOA	100yds

S6

Series

6

Victoptics S6




Brian, USA

The S6 packs a lot into an affordable package. It's incredibly versatile and easy to use both up close and far away. The reticle is great for CQB and distance shooting. The glass is clear and the eye box and eye relief are forgiving.

FEATURE

1-6x24 | 1-6x24i


- 30mm Monotube
- Fully Multi-coated
- Wide Field of View
- R & G Illumination
- Turret Lock Feature
- Edge-to-Edge Clarity



SFP

1-6x24 | 1-6x24 FDE OPSL22 | OPSL23


Low Power Variable Optic | 1/5MIL Adjustment with Turret Lock Feature
5 Levels **R** & **G** Illumination
Available in Coyote FDE 



SFP

1-6x24i Fiber OPSL33


Low Power Variable Optic | Fiber Center Dot Reticle
6 Levels **R** Illumination | 1/5MIL Adjustment with Turret Lock Feature



SFP

1-6x24 | 1-6x24 FDE One Piece High Mount Combo


OPSL122 | OPSL123
Low Power Variable Optic | 1/5MIL Adjustment with Turret Lock Feature
5 Levels **R** & **G** Illumination | With One Piece 49mm 1.93" High Picatinny Mount
Available in Coyote FDE 



SFP


1-6x24i Fiber One Piece High Mount Combo OPSL133

Low Power Variable Optic | Fiber Center Dot Reticle
6 Levels **R** Illumination | 1/5MIL Adjustment with Turret Lock Feature
With One Piece 49mm 1.93" High Picatinny Mount



Victoptics S6

7



PRODUCT SPECS

SKU	Name	Reticle	Illumination	Eye Relief (mm/in)	F.O.V (ft@100 yds)	Adjustment Range	Tube Size	Length (mm/in)	Weight (net)(g/oz)	Click Value	Parallax Adjustment
OPSL22/122	1-6x24 SFP	VI-CTSIX	5 Levels R & G	100 / 4.0	109.2-18.2	>50MIL	30mm	249 / 9.8	425 / 15.0	1/5MIL	100yds
OPSL23/123	1-6x24 SFP	VI-CTSIX	5 Levels R & G	100 / 4.0	109.2-18.2	>50MIL	30mm	249 / 9.8	425 / 15.0	1/5MIL	100yds
OPSL33/133	1-6x24 SFP	VIS-F1 Fiber	6 Levels R	100 / 4.0	109.2-18.2	>50MIL	30mm	249 / 9.8	425 / 15.0	1/5MIL	100yds

S4

Series

∞

Victoptics S4

S4 Series



Rodrigo Melo, Brazil

The VictOptics LPVO OP3L32 fits perfectly on my ICS MK3 DMR. Light, crystal clear, and with that aggressive look we all love! This is an awesome combo!

FEATURE

1.5-6x28 | 3-12x40 | 4-16x44 | 6-24x50

- 30mm Monotube
- Edge-to-Edge Clarity

- Fully Multi-coated
- Turret Lock Feature


- Wide Field of View



SFP

1.5-6x28 OPSL32


Low Power Variable Optic | 1/5MIL Adjustment with Turret Lock Feature
5 Levels R & G Illumination | With Power Ring Lever Mount



SFP

3-12x40 OPSL31


30mm Monotube | Fully Multi-coated
1/10MIL Adjustment with Turret Lock Feature



SFP

4-16x44 | 6-24x50


OPSL16 | OPSL26 | OPSL17
1/10MIL Adjustment with Turret Lock Feature
With Power Ring Lever Mount & Big Side Wheel



FFP

4-16x44 | 6-24x50 OPFF-01 | OPFF-02

First Focal Plane Scope | 1/10MIL Adjustment with Turret Lock Feature
With Power Ring Lever Mount & Big Side Wheel



PRODUCT SPECS

SKU	Name	Reticle	Illumination	Eye Relief (mm/in)	F.O.V (ft@100 yds)	Adjustment Range	Tube Size	Length (mm/in)	Weight (net)(g/oz)	Click Value	Parallax Adjustment
OPSL32	1.5-6x28 SFP	VMD-2	5 Levels R & G	100 / 4.0	72.8-18.2	30MIL	30mm	250 / 9.8	395 / 13.9	1/5MIL	100yds
OPSL31	3-12x40 SFP	MDL	N/A	96 / 3.8	45.4-1.6	18MIL	30mm	348 / 13.7	500 / 17.6	1/5MIL	10yds to ∞
OPSL16	4-16x44 SFP	MDL	N/A	96 / 3.8	28.8-7.2	15MIL	30mm	317 / 12.5	530 / 18.7	1/10MIL	15yds to ∞
OPSL17	6-24x50 SFP	MDL	N/A	96 / 3.8	21.2-5.3	13MIL	30mm	375 / 14.8	555 / 19.6	1/10MIL	20yds to ∞
OPSL26	4-16x44 FDE SFP	MDL	N/A	96 / 3.8	28.8-7.2	15MIL	30mm	317 / 12.5	500 / 17.6	1/10MIL	15yds to ∞
OPSL27	6-24x50 FDE SFP	MDL	N/A	96 / 3.8	21.2-5.3	13MIL	30mm	375 / 14.8	530 / 18.7	1/10MIL	20yds to ∞
OPFF-01	4-16x44 FFP	VIS-FMIL	N/A	96 / 3.8	28.8-7.2	15MIL	30mm	317 / 12.5	518 / 18.3	1/10MIL	15yds to ∞
OPFF-02	6-24x50 FFP	VIS-FMIL	N/A	96 / 3.8	21.2-5.3	13MIL	30mm	375 / 14.8	555 / 19.6	1/10MIL	20yds to ∞

SOI

Series

10

Victoptics SOI



Chloe Englefield, USA

This time I paired with the one and only @victoptics – the perfect match. This VIOC-02 optic, built for CQB recreational shooting, definitely suits my needs: lightweight, compact, and clean in design. CQB is my playground. Let's get to work.

FEATURE

1.5-5x20 | 2-7x32 | 3-9x40 | 4-12x40

- R & G Illumination
- Edge-to-Edge Clarity


- Fully Multi-coated
- Turret Lock Feature

- Wide Field of View




SFP

1.5-5x20 VIOC-01
1" (25.4mm) Tube | Fully Multi Coated | 5 Levels **R & G**




SFP

2-7x32 VIOC-02
1" (25.4mm) Tube | Fully Multi Coated | 5 Levels **R & G**




SFP

3-9x40 | 4-12x40 VIOC-03 | VIOC-04
Fully Multi Coated | 5 Levels **R & G**



SFP

3-9x40 AOE | 4-12x40 AOE VIOC-05 | VIOC-06
Fully Multi Coated | 5 Levels **R & G**




PRODUCT SPECS


SKU	Name	Reticle	Illumination	Eye Relief (mm/in)	F.O.V (ft@100 yds)	Adjustment Range	Tube Size	Length (mm/in)	Weight (net)(g/oz)	Click Value	Parallax Adjustment
VIOC-01	1.5-5x20 SFP	VNM-1 MIL	5 Levels R & G	100 / 4.0	84.9-25.5	18MIL	25.4mm	220 / 8.7	297 / 10.5	1/5MIL	50yds
VIOC-02	2-7x32 SFP	VNM-1 MIL	5 Levels R & G	100 / 4.0	63.7-18.2	18MIL	25.4mm	234 / 9.2	328 / 11.6	1/10MIL	50yds
VIOC-03	3-9x40 SFP	VNM-1 MIL	5 Levels R & G	100 / 4.0	42.4-14.1	18MIL	25.4mm	305 / 12.0	447 / 15.8	1/10MIL	100yds
VIOC-04	4-12x40 SFP	VNM-1 MIL	5 Levels R & G	100 / 4.0	31.8-10.6	14.5MIL	25.4mm	335 / 13.2	458 / 16.2	1/10MIL	100yds
VIOC-05	3-9x40 AOE SFP	VNM-1 MIL	5 Levels R & G	100 / 4.0	28.8-10.2	18MIL	25.4mm	317 / 12.5	520 / 18.3	1/10MIL	5yds to ∞
VIOC-06	4-12x40 AOE SFP	VNM-1 MIL	5 Levels R & G	100 / 4.0	24.9-8.4	20MIL	30mm	353 / 13.9	580 / 20.4	1/10MIL	10yds to ∞

C1


4x32 | 4x32 FDE OPSL40 | OPSL41
 Prism Scope | Fully Multi Coated | **R** & **G** Illumination
 Available in Coyote FDE 

**X4**


1-4x20 OPSL18 | OPSL21
 1" (25.4mm) Tube | Fully Multi Coated

**A1**

4x32 OPSL19
 1" (25.4mm) Tube | Multi Coated | 1/4MOA Adjustment

**B3**

3-9x40 OPSL20
 1" (25.4mm) Tube | Multi Coated | 1/4MOA Adjustment




PRODUCT SPECS

SKU	Name	Reticle	Illumination	Eye Relief (mm/in)	F.O.V (ft@100 yds)	Adjustment Range	Tube Size	Length (mm/in)	Weight (net)(g/oz)	Click Value	Parallax Adjustment
OPSL40/41	4x32 SFP	VCC1-1 MIL	5 Levels R & G	55 / 2.17	39.0	90MOA	N/A	136 / 5.4	386 / 13.6	1/2MOA	50yds
OPSL18	1-4x20 SFP	VMD-2	N/A	110 / 4.3	68.0-23.8	200MOA	25.4mm	235 / 9.3	325 / 11.5	1/2MOA	50yds
OPSL21	1-4x20IR SFP	VMD-2	5 Levels R & G	110 / 4.3	68.0-23.8	200MOA	25.4mm	235 / 9.3	320 / 11.3	1/2MOA	50yds
OPSL19	4x32 SFP	Duplex	N/A	80 / 3.1	36.6	90MOA	25.4mm	292 / 11.5	280 / 11.0	1/4MOA	50yds
OPSL20	3-9x40 SFP	VMD-2	N/A	78 / 3.1	34.6-12.6	60MOA	25.4mm	310 / 12.2	370 / 13.0	1/4MOA	100yds


A3

2-6x32 OPSL09
1" (25.4mm) Tube | 5 Levels **R** & **G** | 1/4MOA Adjustment




B1

4x32C OPSL25
1" (25.4mm) Tube | Multi Coated | 1/4MOA Adjustment




C3

3-9x32 OPSL28
1" (25.4mm) Tube | Turret Lock | **R** & **G** Illumination




PRODUCT SPECS

SKU	Name	Reticle	Illumination	Eye Relief (mm/in)	F.O.V (ft@100 yds)	Adjustment Range	Tube Size	Length (mm/in)	Weight (net)(g/oz)	Click Value	Parallax Adjustment
OPSL09	2-6x32 SFP	R14 Ranging	5 Levels R & G	95 / 3.7	15.7-42.0	60MOA	25.4mm	210 / 8.3	360 / 12.7	1/4MOA	10yds to ∞
OPSL25	4x32C SFP	R14 Ranging	N/A	90 / 3.5	33.7	90MOA	25.4mm	191 / 7.5	230 / 8.1	1/4MOA	100yds
OPSL28	3-9x32 SFP	MIL-DOT	Stepless R & G	100 / 4.0	37.0-12.5	120MOA	25.4mm	208 / 8.2	385 / 13.6	1/4MOA	10yds to ∞

SCB**2-5x24IR** OPSL3030mm Tube | BDC Crossbow Reticle | 5 Levels **R** & **G**

VCB-CDO (MOA)

C4**3-12x40** OPSL291" (25.4mm) Tube | Fully Multi Coated
Objective Lens Focus

VMD-2 (MOA)

PRODUCT SPECS

SKU	Name	Reticle	Illumination	Eye Relief (mm/in)	F.O.V (ft@100 yds)	Adjustment Range	Tube Size	Length (mm/in)	Weight (net)(g/oz)	Click Value	Parallax Adjustment
OPSL30	2-5x24IR SFP	VCB-CDO	5 Levels R & G	96 / 3.8	63.7-25.5	60MOA	30mm	248 / 9.8	380 / 13.4	1/2MOA	30yds
OPSL29	3-12x40 SFP	VMD-2	N/A	95 / 3.7	35.0-11.6	60MOA	25.4mm	332 / 13.0	470 / 16.6	1/4MOA	10yds to ∞



Red Dot

Series

Victoptics red dot 16

FEATURE

SRD · V3 · V4 · T1 · T4 · T5 · Z1 · Z3 · Z4 · Z5

- Automatic Light-Sensitive Sensor
- 7075-T6 Aluminum Housing
- Large Window
- Lightweight Design
- 8 Reticle



Multi-Reticle



7075-T6
Aluminum Alloy



Automatic Light



Lightweight
Design



Illumination



1-year warranty



V2

1x18 | RDSL01

3 MOA Dot Size

6 Levels **R**

Weaver Mount

TEK™ Red Dot Footprint



V3

1x17x22 | RDSL16

3.5 MOA Dot Size

6 Levels **R**

21mm Weaver Mount

TEK™ Red Dot Footprint



1x17x22 | RDSL18

3.5 MOA Dot Size

6 Levels **R**

11mm Dovetail Mount

TEK™ Red Dot Footprint



1x17x26 | RDSL25

4 MOA Dot Size

6 Levels **R**

21mm Weaver Mount

MOJ™ Red Dot Footprint



RETICLE

RDSL01 1x18


RDSL16 1x17x22

RDSL18 1x17x22

RDSL25 1x17x26




TEK™



Setting: mm

MOJ™



Setting: mm



T1

1x35 | RDSL05

3 MOA Dot Size

5 Levels **R** & **G**

Available In Weaver
& Dovetail Mount



T4

1x28 | RDSL29

5 MOA Dot Size

5 Levels **R** & **G**

Riser & Low Picatinny Mount



T5

1x22 | RDSL38

3 MOA Dot Size

5 Levels **R** & **G**

50mm Extreme High Center Height




RETICLE

RDSL05 1x35

RDSL29 1x28

RDSL38 1x22





Z1 1x23x24 | RDSL15

Multi-Reticle

5 Levels **R** & **G**

Weaver Mount



Z4 1x23x24 | RDSL26

Multi-Reticle

5 Levels **R** & **G**

Picatinny QD Mount



Z3 1x22x33 | RDSL03

Multi-Reticle

Stepless **R** & **G**

Weaver Mount



Z5 1x26x32 | RDSL39

Multi-Reticle

5 Levels **R** & **G**

Weaver Mount




RETICLE

RDSL15 1x23x24

RDSL03 1x22x33

RDSL26 1x23x24

RDSL15 1x26x32

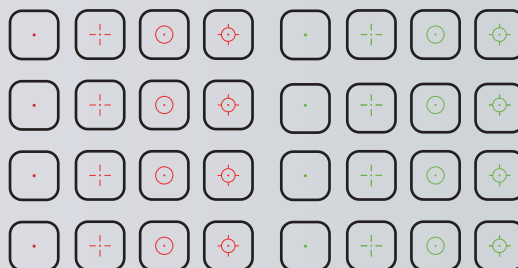

■ SRD

SKU	Reticle	Lens Dia	Eye Relief	Length (mm / in)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Finish	Dot Intensity	Battery Type
RDSL34	4MOA	18x20mm	Free	47 / 1.85	71 / 2.5	≥90 MOA	≥90 MOA	1MOA	Black Matte	8 levels R+1NV	CR2032
RDSL32	3MOA	16x20mm	Free	41 / 1.6	16 / 0.56	≥90 MOA	≥90 MOA	1MOA	Black Matte	Auto Light Sense	CR2032
RDSL33	3MOA	20x25mm	Free	45 / 1.7	28 / 0.99	≥90 MOA	≥90 MOA	1MOA	Black Matte	Auto Light Sense	CR2032
RDSL35	8 Reticle	27x39mm	Free	109 / 4.29	260 / 9.2	≥90 MOA	≥90 MOA	1MOA	Black Matte	6 levels R & G	CR2032
RDSL36	4 Reticle	23x33mm	Free	80 / 3.5	193 / 6.8	≥90 MOA	≥90 MOA	1MOA	Black Matte	6 levels R & G	CR2032
RDSL41	3MOA	30mm	Free	67 / 2.6	170 / 6.0	≥90 MOA	≥90 MOA	1MOA	Black Matte	7 levels R & G	CR2032
RDSL42	3.5MOA	22mm	Free	69 / 2.7	115 / 4.0	≥90 MOA	≥90 MOA	1MOA	Black Matte	11 levels R	CR2032

■ V2 & V3

SKU	Reticle	Lens Dia	Eye Relief	Length (mm / in)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Finish	Dot Intensity	Battery Type
RDSL01	3MOA	18x22.5mm	Free	51 / 2.0	57 / 2.0	≥90 MOA	≥90 MOA	1MOA	Black Matte	6 levels R	CR2032
RDSL16	3.5MOA	17x22mm	Free	46 / 1.8	53 / 1.9	≥90 MOA	≥90 MOA	1MOA	Black Matte	6 levels R	CR2032
RDSL25	4MOA	17x26mm	Free	46 / 1.8	53 / 1.9	≥90 MOA	≥90 MOA	1MOA	Black Matte	6 levels R	CR2032
RDSL18	3.5MOA	17x22mm	Free	46 / 1.8	70 / 1.9	≥90 MOA	≥90 MOA	1MOA	Black Matte	6 levels R	CR2032

■ T1 & T4 & T5

SKU	Reticle	Lens Dia	Eye Relief	Length (mm / in)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Finish	Dot Intensity	Battery Type
RDSL38	3MOA	22mm	Free	69 / 2.7	115 / 4.0	≥90 MOA	≥90 MOA	1MOA	Black Matte	5 levels R & G	CR2032
RDSL29	5MOA	30mm	Free	125 / 4.9	200 / 7.1	≥90 MOA	≥90 MOA	1MOA	Black Matte	5 levels R & G	CR2032
RDSL05	3MOA	35mm	Free	160 / 5.6	110 / 4.3	≥90 MOA	≥90 MOA	1MOA	Black Matte	5 levels R & G	CR2032

■ Z1 & Z3 & Z4 & Z5

SKU	Reticle	Lens Dia	Eye Relief	Length (mm / in)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Finish	Dot Intensity	Battery Type
RDSL15	4 Reticle	23x34mm	Free	80 / 3.1	115 / 4.0	≥90 MOA	≥90 MOA	1MOA	Black Matte	5 levels R & G	CR2032
RDSL03	4 Reticle	22x33mm	Free	82 / 3.2	160 / 5.6	≥90 MOA	≥90 MOA	1MOA	Black Matte	Stepless R & G	CR2032
RDSL26	4 Reticle	23x34mm	Free	82 / 3.2	140 / 4.9	≥90 MOA	≥90 MOA	1MOA	Black Matte	5 levels R & G	LR754
RDSL39	4 Reticle	26x32mm	Free	80 / 3.1	115 / 4.0	≥90 MOA	≥90 MOA	1MOA	Black Matte	5 levels R & G	CR2032

BOSL03 | 8x42 BOSL04 | 10x42

- Multi-Coated Lens
- Roof Prism, Coated Prism
- Center Focus

SKU	Magnification	Lens Dia	Type of Prism	Exit Pupil	Field of View	Eye Relief	Min Focus
BOSL03	7x	42mm	BAK7	5.2	7.5°	18mm	3m
BOSL04	10x			4.0	5.5°		2.6m

SKU	Eyecup Type	Material	Size	Weight
BOSL03	Twist-up	ABS, PVC	147x128x54mm	505g / 17.81oz
BOSL04			143x128.6x54mm	500g / 17.7oz




SSSL02 | 20-60x70

- BAK7 Prism
- Center Focus
- Fully-Multi Coated
- Compact Lightweight

SKU	Magnification	Lens Dia	Type of Prism	Exit Pupil	Field of View	Weight
SSSL02	20-60x	70mm	BAK7 prism	3.55-1.2	2.45-1.26°	664g / 23.4oz


SCOPE COLLIMATOR INSTRUMENT

- Various Focal Length
- Red Dot & Optics
- 25, 50 or 100 Yards


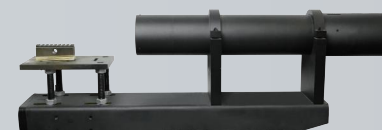







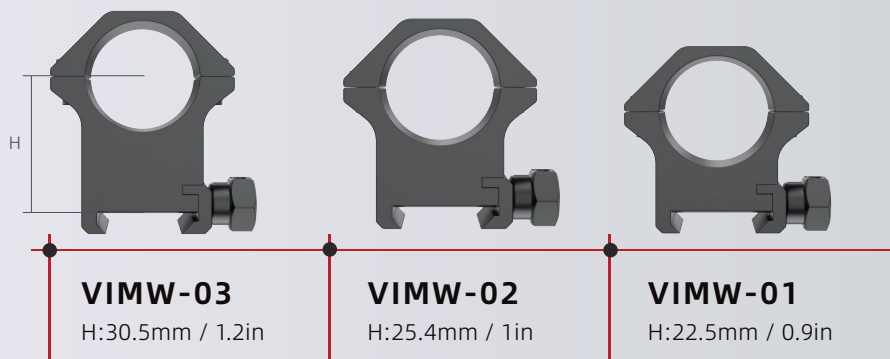

25.4mm^(1") Weaver Rings

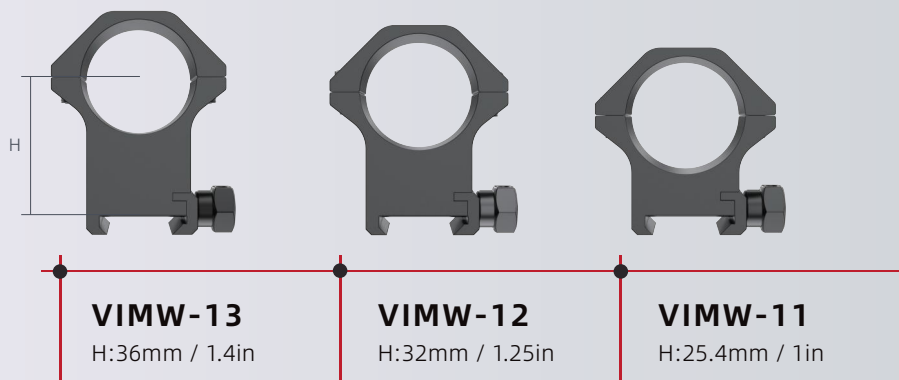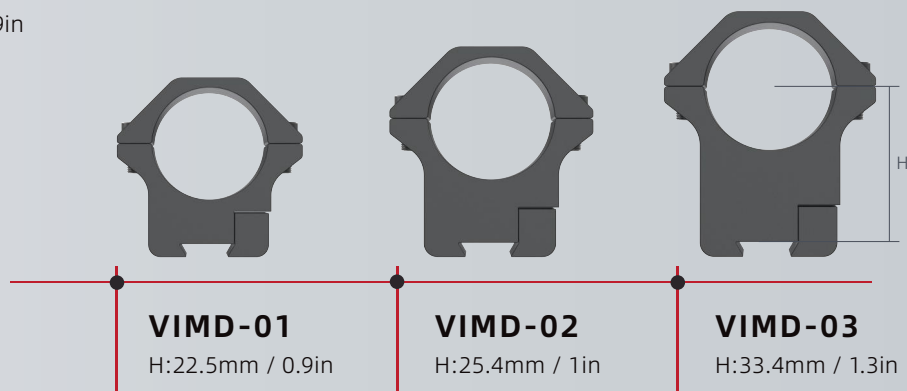

30mm Weaver Rings

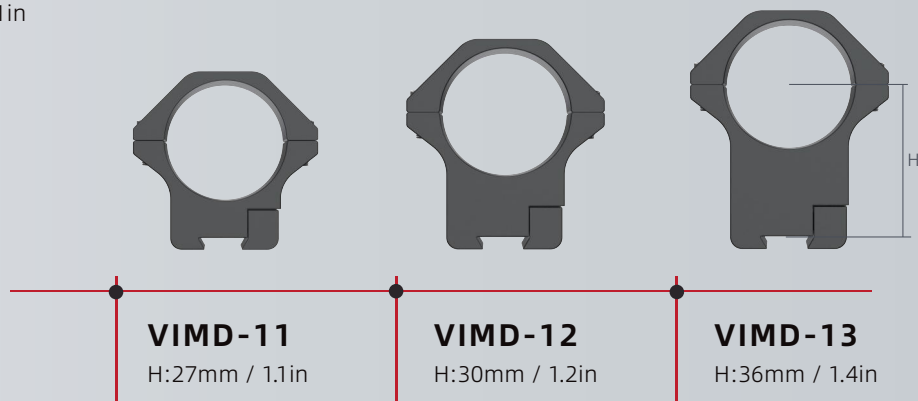

30mm Dovetail Rings

6063-T6 ALUMINUM ALLOY

Memo





 **VICTOPTICS**
www.Victoptics.com



 **VICTOR OPTICS**.com