


Instruction for Vector Optics Predator 1x28x20 Reflexible Sight

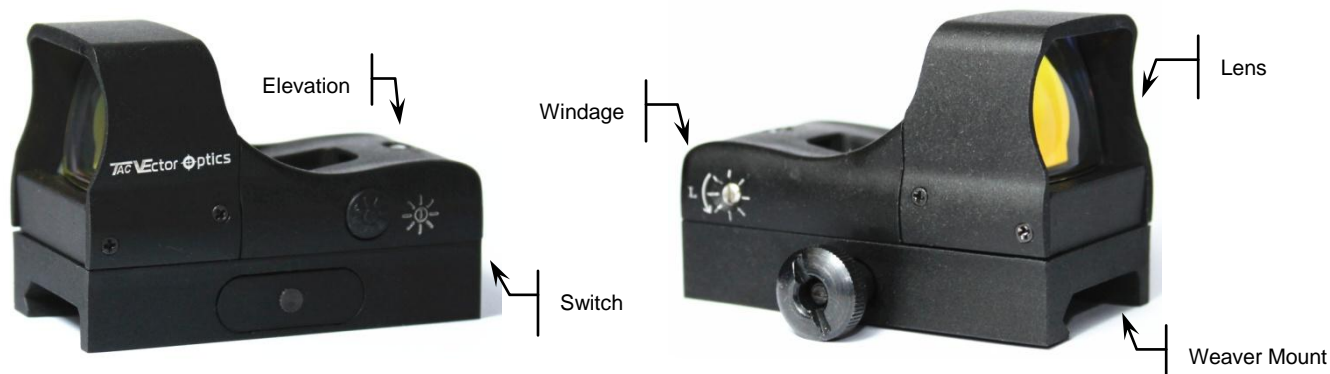

This tubeless design reflex lens aperture provides a wide field of view. It is smaller and lighter than any other sighting device, which is suitable for rapid-firing or moving targets shooting.

MOUNTING

The scope is installed on gun by means of a mount. Simply loosen the weaver base knob and place the scope over the weaver or picatinny rail on your rifle. Fasten the screw to fix it firmly on the rifle.

PRECISION ADJUSTMENTS

Before adjusting the precision, make sure to use screw driver to loosen the two locking screws in the back of the sight. Use the flat screw driver to adjust elevation and windage screws. Finally fasten the two locking screws to fix the reticle.



ILLUMINATION

To turn on the dot, just press the side switch. Continuously press the switch will change the dot brightness. Press more than 3 seconds without release the sight will be turned off at once.

BATTERY EXCHANGE

To exchange the CR2032 battery, just use the supplied hex key to loosen the two screws upside. Take apart the scope from the weaver mount base. Take out the used battery, exchange with a new one and then assemble the scope.

SEALED AND WATERPROOF

The scope is with O-ring to prevent the entry of dust or moisture.

MAINTENANCE

Your riflescope, though amazingly tough, is a precision instrument that deserves reasonable cautious care.

1. When cleaning the lenses, first blow away any dirt and dust, or use a soft lens brush. Fingerprints and lubricants can be wiped off with lens tissue, or a soft clean cotton cloth, moistened with lens cleaning fluid.
2. All moving parts of the scope are permanently lubricated. Do not try to lubricate them.
3. No maintenance is needed on the scope's outer surface, except to occasionally wipe off dirt or fingerprints with a soft cloth.
4. Use lens covers whenever convenient.

STORAGE

Avoid storing the scope in hot places, such as the passenger compartments of vehicles on hot days. The high temperatures could adversely affect the lubricants and sealants. A vehicle's trunk, a gun cabinet or a closet is preferable. Never leave the scope where direct sunlight can enter either the objective or the eyepiece lens. Damage may result from the concentration (burning glass effect) of the sun's rays.

TAC Vector Optics

www.scvector.com

