


Instruction for Vector Optics Torrent 1x20 Red Dot Scope

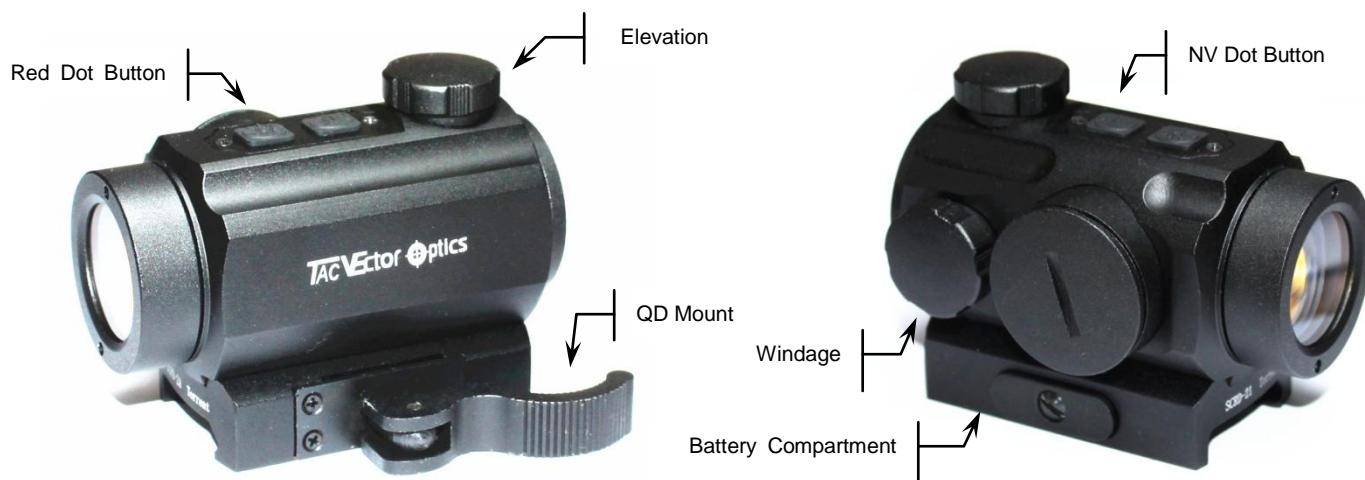

MOUNTING

The scope is installed on gun by means of a mount. Simply release the QD mount level and place the scope over the weaver or picatinny rail on your rifle. Fasten the screw to fix it firmly on the rifle. If it is too tight or too loose on the rail, just use proper screw driver to adjust the screw in the other side.

PRECISION ADJUSTMENTS

Remove windage and elevation adjustment caps. Before adjust make sure the scope is mounted on the gun on a solid support. Windage is the horizontal (left-to-right) adjustment, usually the side turret of the scope. Elevation is the vertical (up-and-down) adjustment, usually the top turret of the scope.

The scope features 1/2 M.O.A. (1/2" at 50 yards according to the factory setting) windage and elevation adjustment. Each audible click of adjustment changes bullet strike at a shooting distance by the amount indicated.

Red Dot and Infrared Dot Adjustment

The red dot & IR dot are both with 7 levels brightness. Press the button to change brightness level. Press without release more than 3 seconds the dot will be off. The dot will be automatically off if without any action more than one hour.

BATTERY EXCHANGE

To exchange the CR2032 battery, just use coins or similar tools to release the thin cap of battery compartment. Take out the used battery, exchange with a new one and then fasten the cap.

SEALED AND WATERPROOF

The scope is with O-ring to prevent the entry of dust or moisture.

MAINTENANCE

Your red dot scope, though amazingly tough, is a precision instrument that deserves reasonable cautious care.

1. When cleaning the lenses, first blow away any dirt and dust, or use a soft lens brush. Fingerprints and lubricants can be wiped off with lens tissue, or a soft clean cotton cloth, moistened with lens cleaning fluid.
2. All moving parts of the scope are permanently lubricated. Do not try to lubricate them.
3. No maintenance is needed on scope's outer surface, except to occasionally wipe off dirt or fingerprints with soft cloth.
4. Use lens covers whenever convenient.

STORAGE

Avoid storing the scope in hot places, such as the passenger compartments of vehicles on hot days. The high temperatures could adversely affect the lubricants and sealants. A vehicle's trunk, a gun cabinet or a closet is preferable. Never leave the scope where direct sunlight can enter either the objective or the eyepiece lens.

Damage may result from the concentration (burning glass effect) of the sun's rays.

TACVector Optics

www.scvector.biz www.scvector.com

